

Users

868

↑ 16.5%

Sessions

1,062

↑ 11.8%

Pageviews

5,515


↓ 0.0%

Bounce Rate


0.1%

↓ -55.3%

How are site sessions trending?

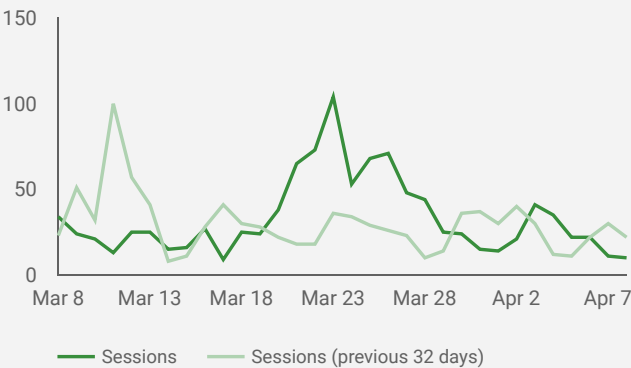


What are the top countries by sessions?

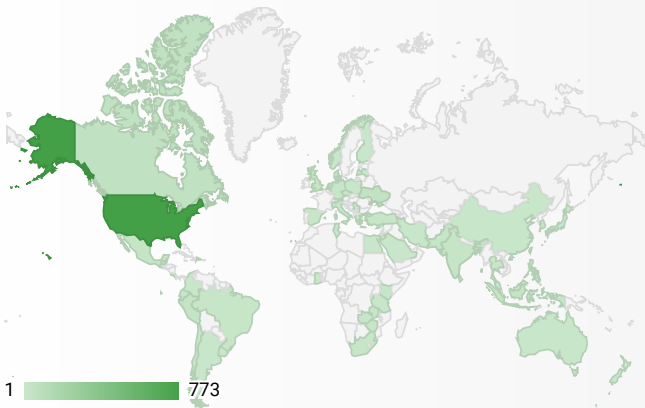


Which channels are driving engagement?

Goal: Engaged Users

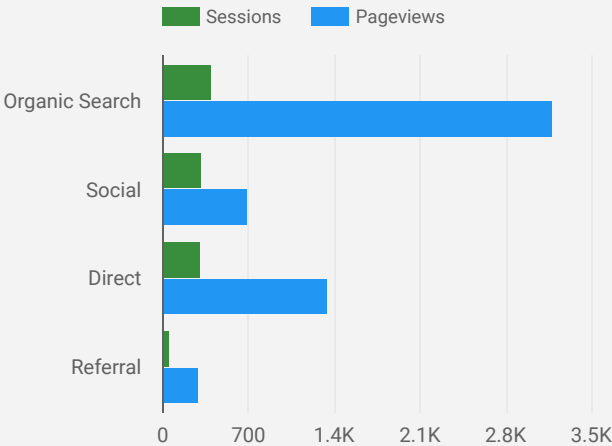

	Country	Sessions ▾	Pageviews
1.	United States	773	3,649
2.	Canada	44	198
3.	Ukraine	38	511
4.	Peru	19	48
5.	Mexico	16	128
6.	India	15	45
7.	Indonesia	12	110
8.	Philippines	10	48
9.	Malaysia	7	30
10.	Germany	7	58
11.	Zimbabwe	6	12
12.	Pakistan	6	12
13.	Turkey	6	46
14.	United Kingdom	6	13
15.	Brazil	5	48
16.	Spain	5	44
17.	Kenya	5	20
18.	Singapore	4	16
19.	South Africa	4	16
20.	Italy	4	20

Engagement by Age & Gender

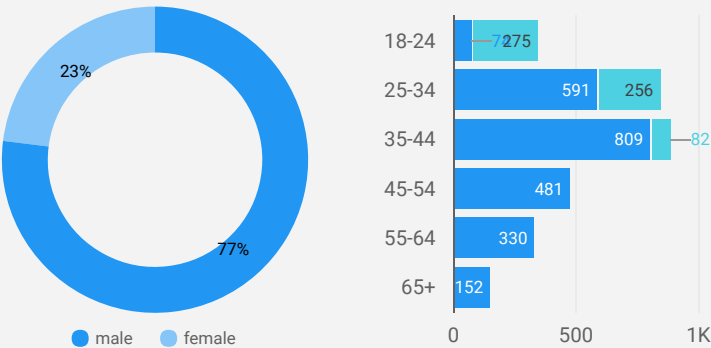

Total of Events


Event Category	Total Events ▾
1. Landing page	1,221
2. LiveChat	387
3. DOWNLOAD GRAINTRAC INFO	78
4. GRAINTRAC	60
5. PC3010	43
6. SAFETRACK	36
7. DOWNLOAD SAFETRACK INFO	34
8. BIN TEMP DETAILS	34
9. RS24	28
10. GrainTrac Remote bin monitoring and fan control – Anytime, anywhere! Putting information to work View current and past readings Configure alarms Text or email alerts Preserve grain quality Lower energy costs GrainTrac at a glance Easy to upgrade existing systems Readings taken 4x/day for timely temperature data Real time temperature availability Data sent to secure website Optional WeatherTrac Remote Weather Station DOWNLOAD GRAINTRAC INFO	22
11. SafeTrack Wireless Volume and grain temperature monitoring system SafeTrack is a complete and easy solution for monitoring commodity volume and temperatures. Data analyzing, reporting, and archiving are quick and easy. Wireless radio options minimize conduit and installation costs. Modular components are expandable to any size system. Additional features Volume monitoring (+ or – 4%) Commodity temperatures OHMs testing for cable integrity check Product rate-of-rise Detailed audit trail Historical graphing to plot trends Flexible reporting options Remote scanning via the Internet Manual or scheduled scanning and reporting DOWNLOAD SAFETRACK INFO	20
12. DOWNLOAD REMOTE SWITCH INFO	18
13. REQUEST A QUOTE	17
14. BTM DETAILS	17
15. DOWNLOAD MAXISCAN INFO	13
16. undefined	13
17. BELT ONLY	12
18. Hazard Monitoring BELT ONLY BELT – BEARING – MOTION MAXISCAN BEARING ONLY REQUEST A QUOTE MOTION ONLY BELT – BEARING – MOTION BEAR SCAN	12
19. SAFESCAN DETAILS	11
20. DOWNLOAD PC3010 INFO	10
21. The TSGC RS24 Remote Switch has 24 cable card connectors, mounted on a motherboard. Each card connector will accept wither the 12 or 18 T/C cable card. You need only as many T/C cable cards as cables in the application.	10
22. DOWNLOAD BIN TEMP INFO	9
23. Portable Grain Monitoring BIN TEMP DETAILS BTM DETAILS REQUEST A QUOTE SAFESCAN DETAILS	8
24. SafeScan Handheld grain temperature scanner SafeScan Digital Scanner is a handheld portable device for monitoring grain temperatures using the TSGC Central Reading Station (CRS). Together with SafeScan software, it provides a complete, yet economical grain quality solution. SafeScan in action Easy to use scanning and reporting The 7 most recent temperature readings are saved in the scanner for easy review in the field or at the PC SafeScan Software provides data viewing, analyzing, graphing, reporting, and archiving Clear color graphics for at-a-glance analysis Additional features Fast scanning of temperature cables AA battery powered handheld scanner Rugged military-spec connector Padded carrying case included Color graph shows temperature trends Measures OHMs for temperature cable verification Software archives all the readings For use with thermocouple temperature cables Data analysis with color-coded temperatures and alarms DOWNLOAD SAFESCAN INFO	8
25. RS24 Remote Switch The TSGC RS24 Remote Switch has 24 cable card connectors, mounted on a motherboard. Each card connector will accept wither the 12 or 18 T/C cable card. You need only as many T/C cable cards as cables in the application. Quality & reliability features Relay system with hermetically (environmentally protected) sealed relays Gold-plated contact points on all connectors LED indication on the cable cards – aids in troubleshooting and checkout Flexibility and growth features Customer flexibility – switch relays data for use in conjunction with a PLC to create a custom aeration program Cost effective – a PLC with TSGC's remote switch (or switches) can be set up to automatically control fans, which saves energy and manpower Serviceability and growth – modular components for ease in replacement or expansion DOWNLOAD REMOTE SWITCH INFO	8

Goal Conversion Rates (Contact Us)

Default Channel Grouping	Goal Completions	Goal Conversion Rate ▾
1. Referral	21	42.86%
2. Organic Search	110	27.57%
3. Direct	30	10.03%
4. Social	1	0.32%

1 - 4 / 4 < >


Browsers

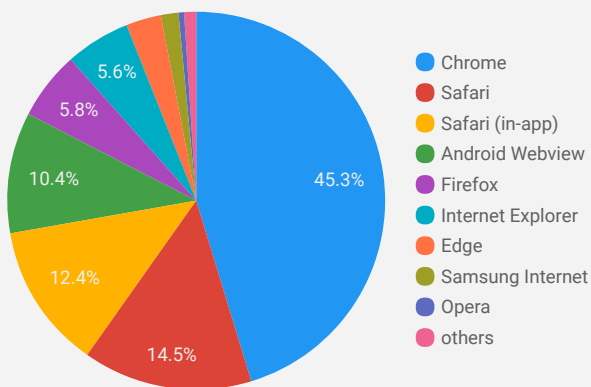

Browser	Sessions ▾
1. Chrome	481
2. Safari	154
3. Safari (in-app)	132
4. Android Webview	110
5. Firefox	62
6. Internet Explorer	59
7. Edge	32
8. Samsung Internet	16
9. Opera	5
10. Mozilla Compatible Agent	5
11. Opera Mini	2
12. Amazon Silk	2
13. (not set)	1
14. Android Browser	1

1 - 14 / 14 < >


Device Percentage per Sessions

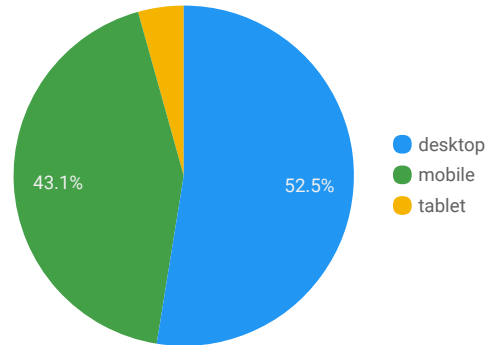

Device Category	Sessions ▾	% New Sessions	New Users
1. desktop	558	72.04%	402
2. mobile	458	86.03%	394
3. tablet	46	73.91%	34

1 - 3 / 3 < >

Users

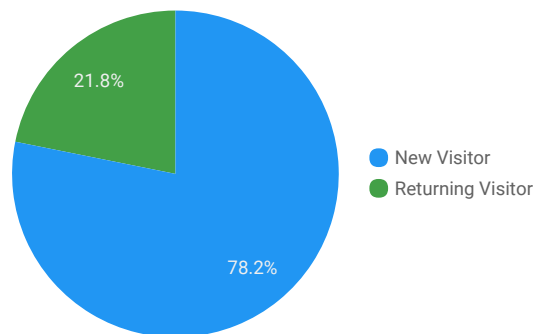

User Type	Sessions ▾	Pages / Session
1. New Visitor	830	4.54
2. Returning Visitor	232	7.51

1 - 2 / 2 < >